


RESIDUCT™ TAPER - 204 X 60MM



Product Specification

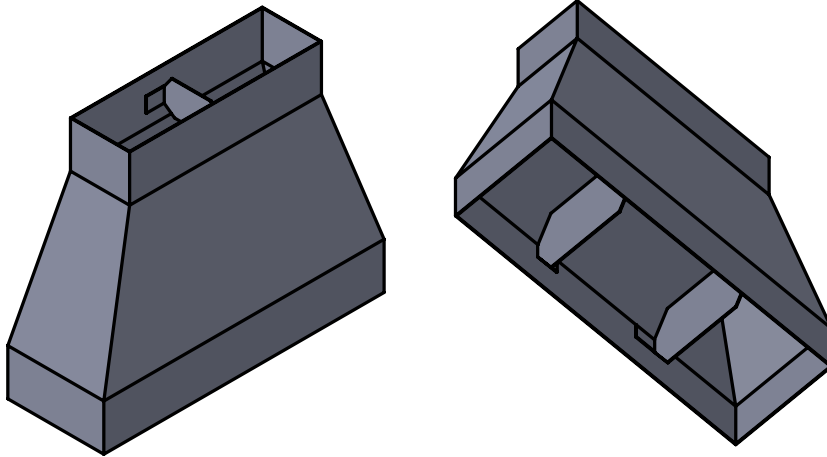

The ResiDUCT™ Taper is part of the ResiDUCT™ system range;

- Manufactured from 0.6mm galvanised steel
- DW144 Specification
- Socket seal jointing (female connection)
- Suitable for connection to 204 x 60mm ducting
- Integral ResiDUCT™ stiffeners for additional strength and reduction in air leakage as parts are joined together
- Available in 300x100, 300x125, 400x100, 400x125 (mm)
- Bespoke sizes available on request

Product Dimensions



SIDE VIEW

Range (mm)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	H (mm)
300 x 100	303	304.2	103	104.2	207	208.2	63	64.2
300 x 125	303	304.2	127	128.2	207	208.2	63	64.2
400 x 100	403	404.2	103	104.2	207	208.2	63	64.2
400 x 125	403	404.2	127	128.2	207	208.2	63	64.2

Product Range Info

Range Size (mm)	Part Code	Minimum Free Area (mm²)	Dimensions (mm)	Description	Connection	Material (mm)	Weight (kg)	Manufactured To
300 x 100	RD/30010020460	11,452 to 29,521	303x103>207x63	Taper	Female	0.6	1.4	DW144
300 x 125	RD/30012520460	11,452 to 36,991	303x127>207x63	Taper	Female	0.6	1.5	DW144
400 x 100	RD/40010020460	11,452 to 39,401	403x103>207x63	Taper	Female	0.6	1.7	DW144
400 x 125	RD/40012520460	11,452 to 49,371	403x127>207x63	Taper	Female	0.6	1.8	DW144

Design Registration: 6378295

Downloadable files available at www.pinnacleductwork.co.uk – BIM, CAD, Consultant Specification, Brochure & Install Best Practice

Performance independently tested by BSRIA