



Product Specification

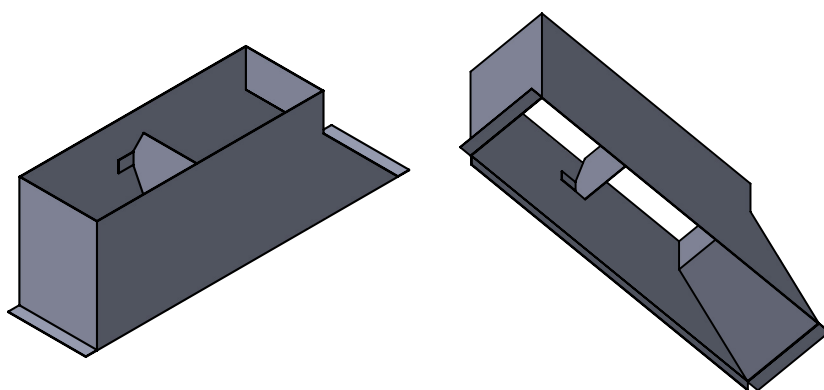

The ResiDUCT™ Flat Shoe is part of the ResiDUCT™ system range;

- Manufactured from 0.6mm galvanised steel
- DW144 Specification
- Socket seal jointing (female connection)
- Integral ResiDUCT™ stiffeners for additional strength and reduction in air leakage as parts are joined together
- Available in 300x100, 300x125, 400x100, 400x125 (mm)
- Bespoke sizes available on request

Product Dimensions

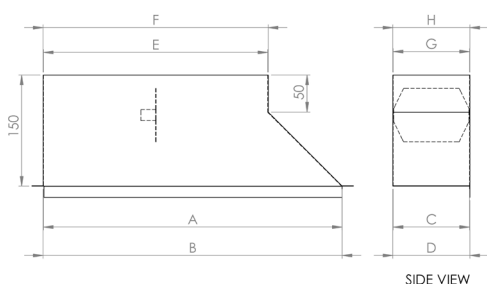

Range (mm)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	H (mm)
300 x 100	403	404.2	103	104.2	303	304.2	103	104.2
300 x 125	403	404.2	127	128.2	303	304.2	127	128.2
400 x 100	503	504.2	103	104.2	403	404.2	103	104.2
400 x 125	503	504.2	127	128.2	403	404.2	127	128.2

Product Range Info

Range Size (mm)	Part Code	Minimum Free Area (mm²)	Dimensions (mm)	Description	Connection	Material (mm)	Weight (kg)	Manufactured To
300 x 100	RD/300100SH	29,521	403x103>303x103	Flat Shoe - Left Hand	Female	0.6	1.3	DW144
300 x 125	RD/300125SH	36,991	403x127>303x127	Flat Shoe - Left Hand	Female	0.6	1.3	DW144
400 x 100	RD/400100SH	39,401	503x103>403x103	Flat Shoe - Left Hand	Female	0.6	1.3	DW144
400 x 125	RD/400125SH	49,371	503x127>403x127	Flat Shoe - Left Hand	Female	0.6	1.3	DW144

Design Registration: 6369536

Downloadable files available at www.pinnacleductwork.co.uk – BIM, CAD, Consultant Specification, Brochure & Install Best Practice

Performance independently tested by BSRIA