


RESIDUCT™ DUCT CONNECTOR



Product Specification

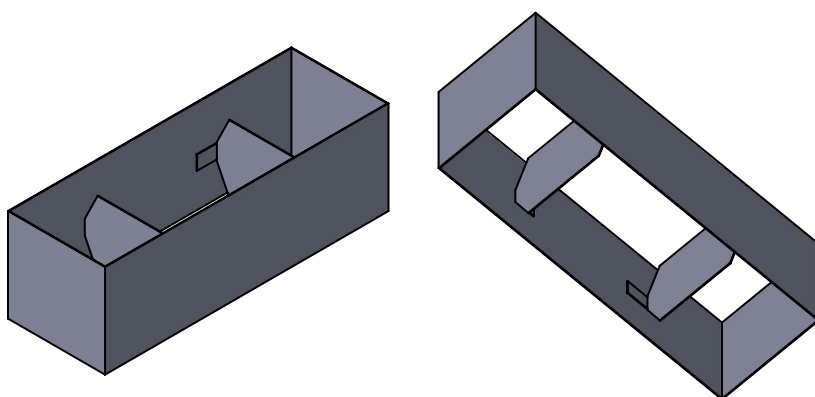

The ResiDUCT™ rectangular straight duct connector is part of the ResiDUCT™ system range;

- Manufactured from 0.6mm galvanised steel
- DW144 Specification
- Socket seal jointing (female connection)
- Integral ResiDUCT™ stiffeners for additional strength and reduction in air leakage as parts are joined together
- Available in 300x100, 300x125, 400x100, 400x125 (mm)
- Bespoke sizes available on request

Product Dimensions

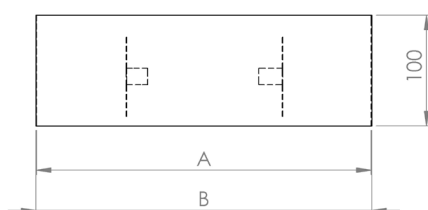

SIDE VIEW

Range (mm)	A (mm)	B (mm)	C (mm)	D (mm)
300 x 100mm	303	304.2	103	104.2
300 x 125mm	303	304.2	127	128.2
400 x 100mm	403	404.2	103	104.2
400 x 125mm	403	404.2	127	128.2

Product Range Info

Range Size (mm)	Part Code	Minimum Free Area (mm ²)	Dimensions (mm)	Description	Connection	Material (mm)	Weight (kg)	Manufactured To
300 x 100	RD/300100DC	29,521	303 x 103 x 100	Straight duct connector	Female	0.6	1.2	DW144
300 x 125	RD/300125DC	36,991	303 x 128 x 100	Straight duct connector	Female	0.6	1.3	DW144
400 x 100	RD/400100D	39,401	403 x 103 x 100	Straight duct connector	Female	0.6	1.4	DW144
400 x 125	RD/400125DC	49,371	403 x 128 x 100	Straight duct connector	Female	0.6	1.6	DW144

Design Registration: 6369533

Downloadable files available at www.pinnacleductwork.co.uk – BIM, CAD, Consultant Specification, Brochure & Install Best Practice

Performance independently tested by BSRIA